



la marque  
du bâtiment

# ETANCH TERR

FLEXIBLE WATERPROOF COATING  
AQUEOUS PHASE

AFNOR CLASSIFICATION, FRENCH STANDARD NFT 36 005 FAMILY 1 CLASS 7B2  
D3 CLASSIFICATION — STANDARD P84.403



## 1. PRESENTATION

**ETANCH TERR** is a coating made of acrylic resin in aqueous dispersion. **ETANCH TERR** is a flexible, non-trafficable waterproof coating that can be coated over. **ETANCH TERR** is a coating that can be used on cracks and breaks.

## 2. ADVANTAGES

- Odourless.
- Quick drying.
- Good opacity.
- Good UV resistance.
- Good adhesion.
- Very easy to apply.
- Permeable to water vapour.
- Wash-proof.
- Not subject to labelling.
- Multiple colours available.
- Microporous.

## 3. AREAS OF APPLICATION

- Non trafficable terraces and roof terraces (except for maintenance).
- Roof repairs and waterproofing.
- Treatment of microcracked chimneys.
- Waterproofing under tiles.
- Ridges, edges, gutters.
- Hoppers, domes.
- Chimney stacks.
- Acroterions and fillets.

## 4. INSTRUCTIONS

Recommendations for implementation:

- Substrates shall have a sufficient gradient (> 5%).
- Eliminate depressions (water pockets) and execute surfacing (**EURO NIV HP** Notice 1).
- Do not apply before 28 days on new concrete and mortar.
- Substrates must be sound, dry and clean.
- Remove Laitances using **DECAP CIM SF**.  
Algae, moss, lichen using **NETT SUPPORT** or **MOUSSTOP 4 PLUS** or **15 PLUS**.  
Traces of oil and grease using **NETT M**.  
Old coats of loose paint using **DECAP ALL**.  
Loose particles (scraping), dust (brushing).
- Rinse with water.
- In the case of chalking substrates, apply the substrate fixative **FIX'O** in solution.
- Wait for **complete drying** before applying **ETANCH TERR**.

*These recommendations cannot replace the appropriate determination of the nature and condition of the substrates to be implemented.*

Treatment of angles and cracks:

- *Product:* **ETANCH TERR**
- *Tools:* Spatula, brush or roller
- *Reinforcement band:* **ARMADORTHZ**, **BAND ARMUR** or **BAND TREILLIS**

*For the application process, please refer to their respective data sheet.*

**EURO DORTHZ PRODUCTION**

42/44 rue Georges Besse — 63100 Clermont-Ferrand — FRANCE  
Tel. +33 (0) 4 73 14 40 40 / Fax +33 (0) 4 73 14 40 44  
Website: [www.dorthz.com](http://www.dorthz.com)





la marque  
du bâtiment

# ETANCH TERR

FLEXIBLE WATERPROOF COATING  
AQUEOUS PHASE

AFNOR CLASSIFICATION, FRENCH STANDARD NFT 36 005 FAMILY 1 CLASS 7B2  
D3 CLASSIFICATION — STANDARD P84.403



Applied between 2 fresh coats of **ETANCH TERR** undiluted using a spatula.  
For low walls and elevations of acroterions: Approx. 10 cm on vertical and horizontal portions.  
For cracks: Over the length and 10 cm on either side (first treat with **JOKER**).  
For terraces and balconies: Over the entire surface (if substrate is microcracked or excessively cracked).

## Implementation:

On porous substrates, apply an undercoat of **ETANCH TERR** diluted to 50% with water (i.e. 1 kg of **ETANCH TERR** for 1 kg of water) at a rate of 50 to 150 g/m<sup>2</sup>. Leave to dry for 2 hours.  
Apply **ETANCH TERR** in 2 coats using a brush or a wool roller at a rate of 800 g/m<sup>2</sup> per coat.  
Leave to dry for 24 hours before applying the second coat.

## Application:

<b>Application conditions</b>	: As per standard NF P 74-201-1
<b>Application temperature</b>	: Between +5°C and +35°C
<b>Hygrometry</b>	: Outdoors, ≤ 80% relative humidity : Indoors, ≤ 65% relative humidity
<b>Application equipment</b>	: Brush, roller
<b>Cleaning of the equipment</b>	: Water (do not allow to dry) : <b>DECAP ALL</b> after drying
<b>Thinner</b>	: Water

## 5. CHARACTERISTICS

<b>Appearance in container</b>	: Smooth paint
<b>Film appearance</b>	: High build, matt
<b>Density</b>	: 1.30 ±0.05 g.cm <sup>-3</sup>
<b>Viscosity</b>	: 25,000 ±3,000 MPa.s <sup>-1</sup>
<b>Dry content</b>	: 50 ±2% by weight
<b>Yield</b>	: Approximately 1.6 kg/m <sup>2</sup> of ready to use product depending on the porosity of the substrate.
<b>Drying (20°C – 65% RH)</b>	: Touch dry in 4 hours
<b>Coating over</b>	: 24 hours
<b>Shelf life</b>	: 1 year in its unopened original packaging

(For more information, please refer to paragraph 9 of the safety data sheet).

### EURO DORTHZ PRODUCTION

42/44 rue Georges Besse — 63100 Clermont-Ferrand — FRANCE  
Tel. +33 (0) 4 73 14 40 40 / Fax +33 (0) 4 73 14 40 44  
Website: [www.dorthz.com](http://www.dorthz.com)





la marque  
du bâtiment

# ETANCH TERR

FLEXIBLE WATERPROOF COATING  
AQUEOUS PHASE


AFNOR CLASSIFICATION, FRENCH STANDARD NFT 36 005 FAMILY 1 CLASS 7B2  
D3 CLASSIFICATION — STANDARD P84.403



## 6. SAFETY OF USE

- See the product's Safety Data Sheet at [www.quickfds.fr](http://www.quickfds.fr).
- Store away from frost.

### ETANCH TERR colour chart:

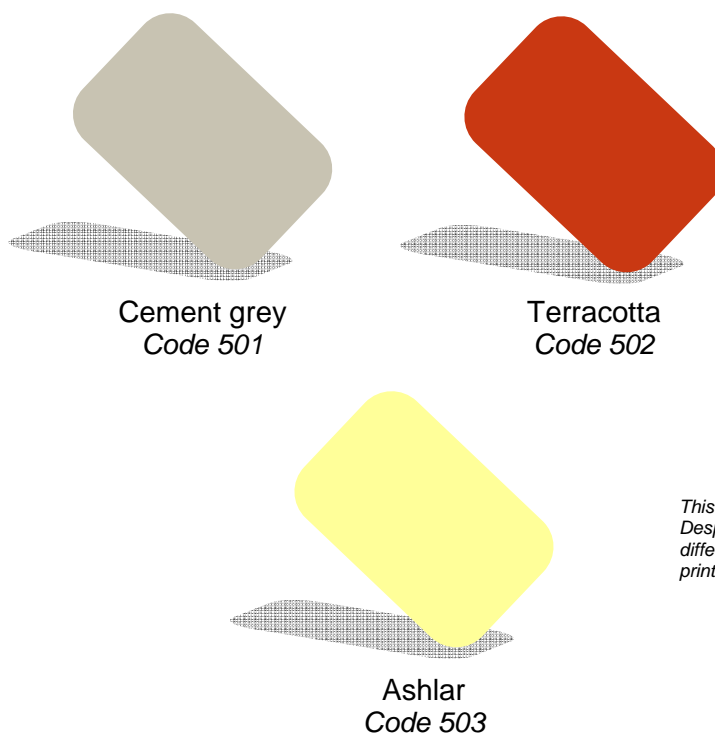

*This colour chart is only indicative.  
Despite all the care taken in preparing this document,  
differences may be observed between the colours  
printed and the actual colours.*

*The details provided in this Data Sheet are given in good faith, for information purposes only. They shall not in any case constitute a guarantee on our part, or engage our responsibility when using our products. This Data Sheet supersedes all previous versions. Compagnie France Chimie reserves the right to make changes to its products and to this data sheet without prior notice. Our clients shall ensure, before any implementation, that these instructions have not been replaced by a more recent version that takes into account new technical data.*

**Product solely intended for professional use.**

**EURO DORTHZ PRODUCTION**

42/44 rue Georges Besse — 63100 Clermont-Ferrand — FRANCE  
Tel. +33 (0) 4 73 14 40 40 / Fax +33 (0) 4 73 14 40 44  
Website: [www.dorthz.com](http://www.dorthz.com)

